

GM1700

BARONNESS

Quality on Demand

GM Series

GM1700

1.5m mid-mount Rotary Mower
Rough/Semi-rough/Slopes



BEVATTNINGSTEKNIK AB
Helsingborgsvägen 578, Varalöv
262 96 ÄNGELHOLM, SWEDEN

Telefon: +46 431 22250
Email : info@bevattningsteknik.se eller philip@bevattningsteknik.se
www.bevattningsteknik.se

BARONESS GM1700


Superb mowing on sloping areas

Extremely stable thanks to a low centre of gravity and four square axles


Light weight (868 to 895kg) combined with high output




Available with "Flexdeck-", Rear- Mulch- or Side-discharge cutting decks

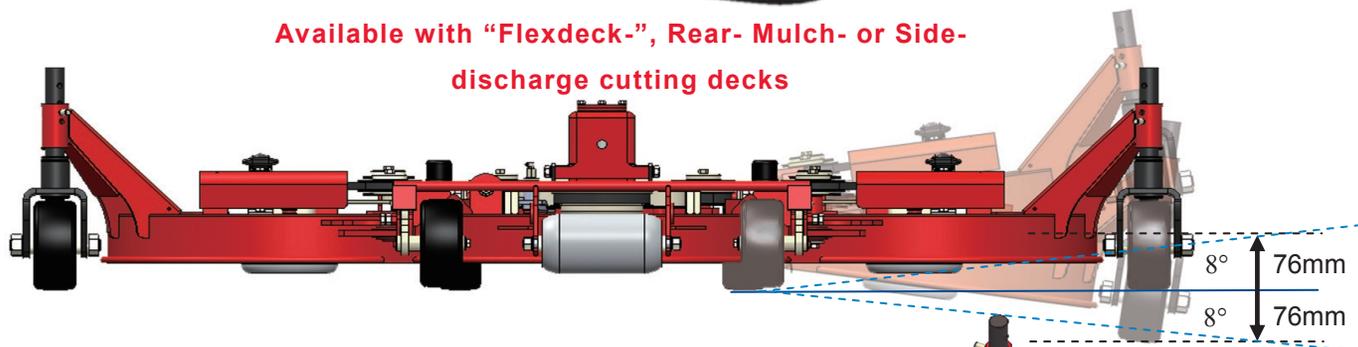

The contour "Flex-deck" prevents scalping and uneven cutting

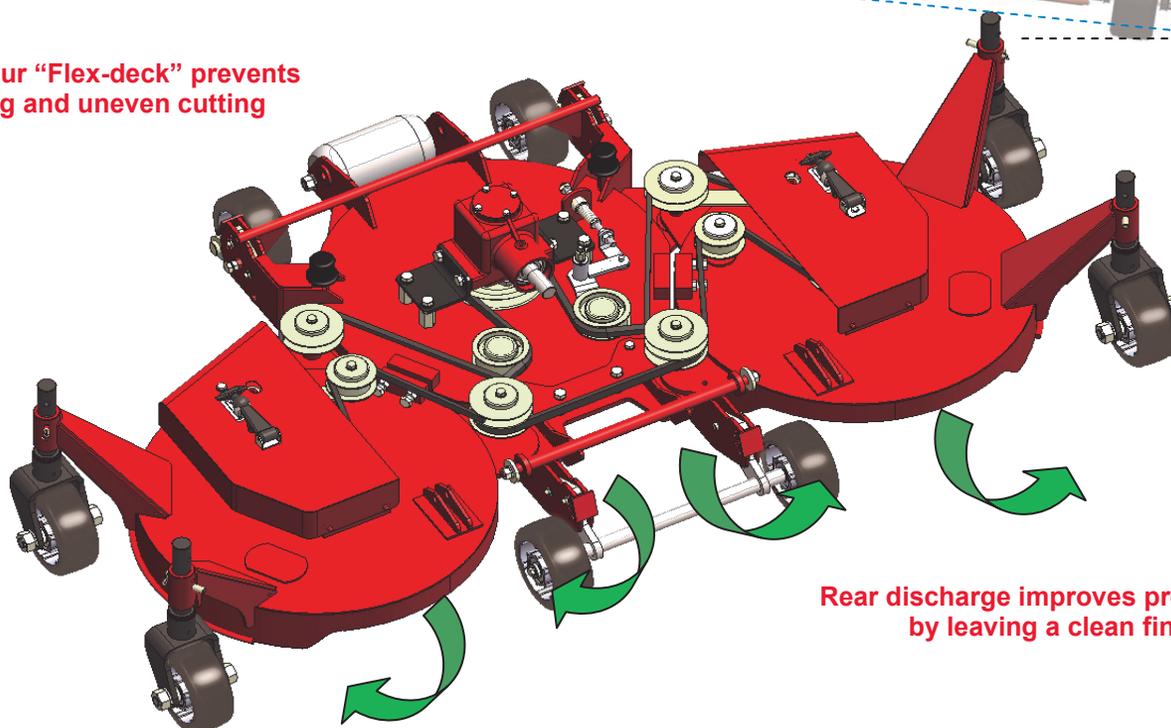

Rear discharge improves presentation by leaving a clean finish

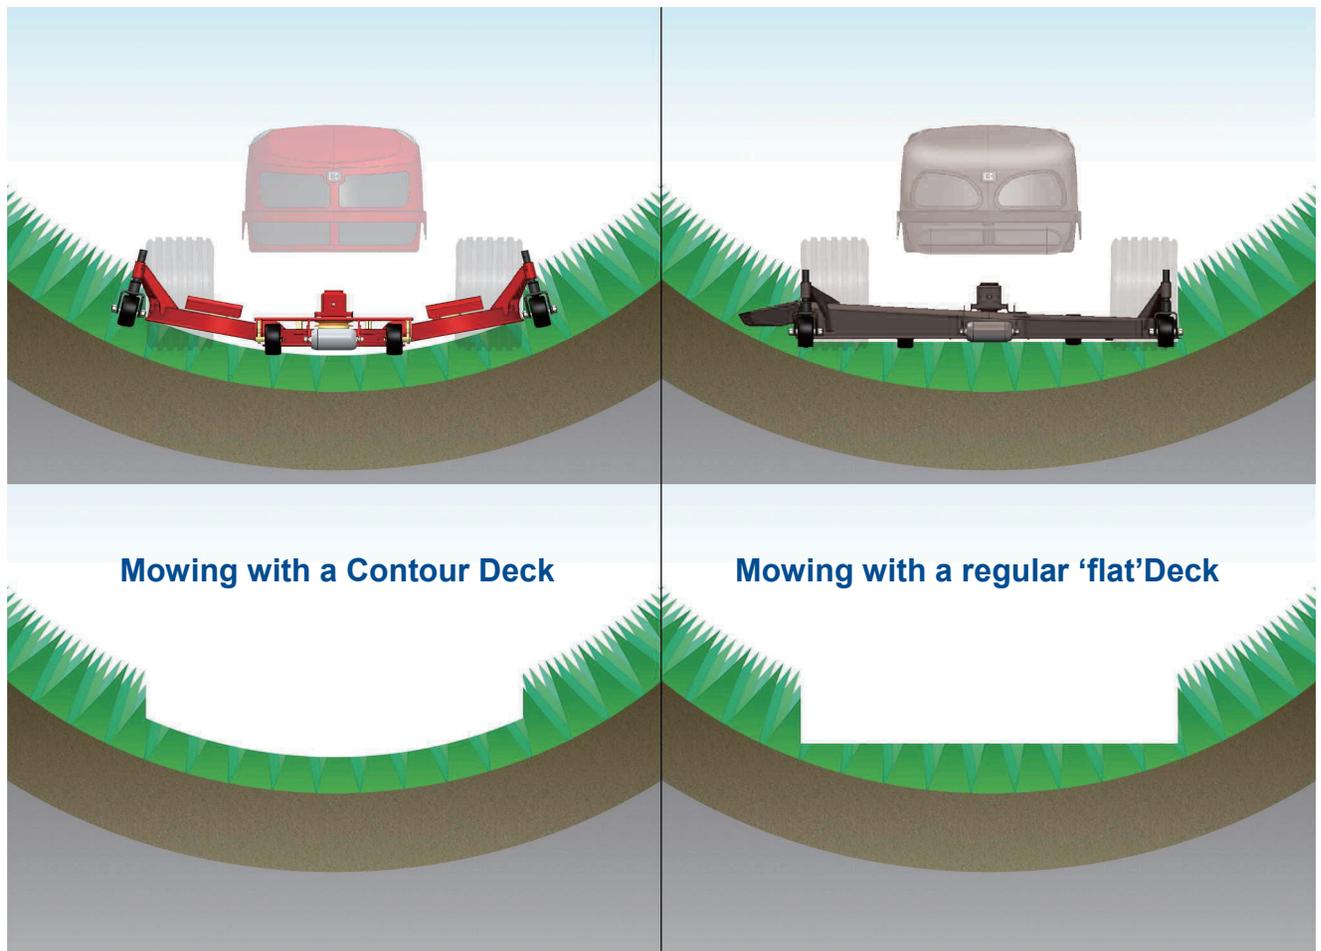

Mow safely on slopes with Baroness



30 degree tilting seat fitted as standard



Integral tilt meter fitted as standard


Unrivalled access and serviceability with Baroness



Kubota D-1105
17.8kW (23hp)
Diesel engine
standard

Easy access for
cleaning

Bonnet quickly
removable for
servicing

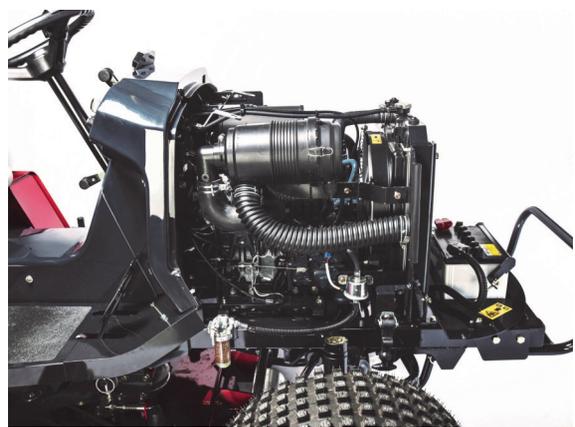

Baroness	GM1700 Specifications
Engine	Kubota D1105 Diesel Displacement 1123cc Power 17,8kW (24,2PS) at 2800 rpm
Transmission	Hydraulic, variable displacement swash plate pump and wheel motors, 2 - or 4 - wheel drive
Mower drive	Power take-off shaft
Speed—Mow/Transport	Forwards: 0 to 16 km/h (Two wheel drive) 0 to 8 km/h (Four wheel drive) Reverse: 0 to 7 km/h
Dimensions	255cm x 167cm x 121/190cm to steering wheel/rollbar
Mowing width	151cm
Mowing height	35mm to 110mm
Tyres	Front/Rear 21 x 11.00-10
Wheelbase	150cm
Wheel track	150cm
Rollbar	Standard
Weight	868kg - 895kg (incl. Rollbar)


Postadress:

TRÄDGÅRDSTEKNIK AB
Helsingborgsvägen 578, Varalöv
262 96 ÄNGELHOLM

Telefon : 0431-222 90
Bg.nr : 5743-7980
Org.nr : 556409-6120

URL:

www.tradgardsteknik.se
E-postadress:
info@tradgardsteknik.se