


High Pressure Strainer

Model BC-80F-P

The BERMAD BC-80F-P Strainer is designed to protect the pipeline and valves from large foreign objects, such as sticks and stones.

It is recommended to install the Strainer upstream from control valves, flow meters and other system components.

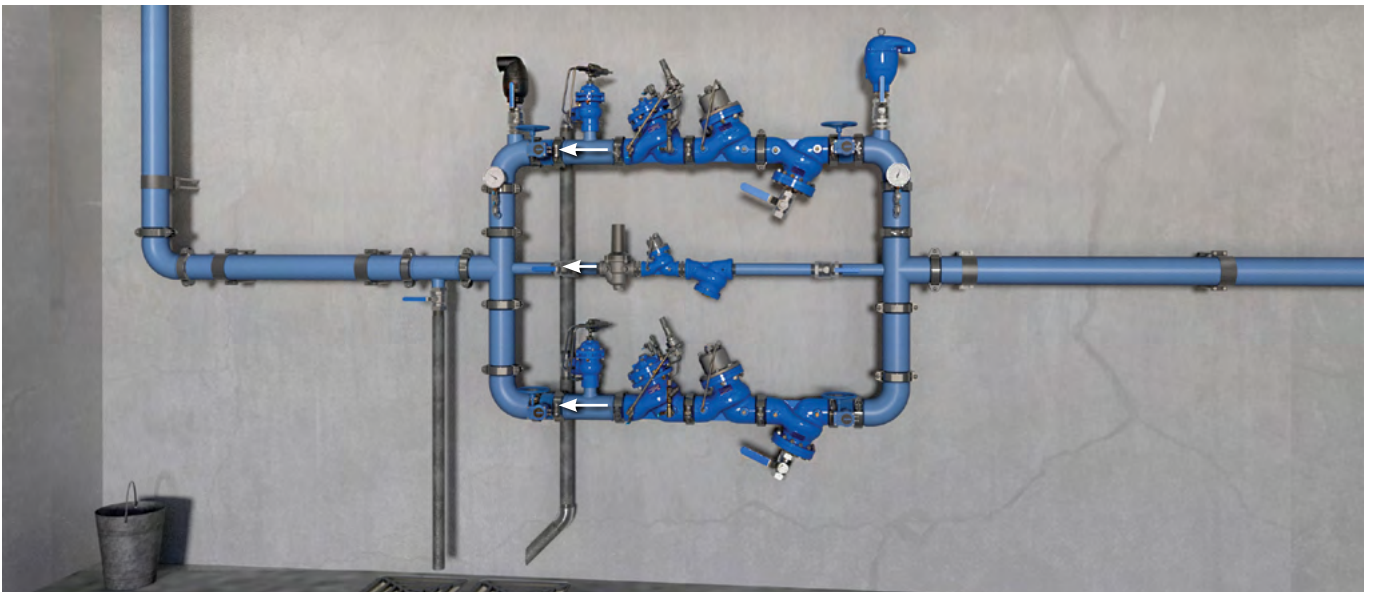


Pressure Reducing Station, featuring BERMAD BC-80F-P Strainers to protect each branch from foreign debris, a redundant, parallel branch to minimize the possibility of total water shut-off and a low flow bypass branch for low demand operation. For information on the other BERMAD products in this system please see the product data sheet for the following components: BERMAD BC-820-PD-P, BERMAD BC-720-P and BERMAD BC-73Q-P.

Typical Application

- Protects control valves against damaging debris.

NOTE: The BERMAD BC-80F-P Strainer is designed for high operating pressures. For lower operating pressures, consider the BERMAD BC-70F-P Strainer.

All images in this catalog are for illustration only



Features and Benefits

- High Quality Construction Materials – Reliable, resilient and long lasting operation
- Robust Design – Suitable for constant, intense operation
- In-Line Serviceable – Quick and easy maintenance and service

Technical Data

End Connections: Grooved, Flanged, Threaded

Pressure Rating: 600 psi; PN40

Pattern: Y (Oblique) and Angle

Working Temperature: Water up to 180°F; 80°C

Materials:

Body:

Standard: Ductile Iron

Optional: Stainless Steel 316

Cover: Cast Steel


Screen: Stainless Steel 304

O-Rings: EPDM

Coating: Fusion Bonded Epoxy, RAL 5017 (Blue)

How to Order


Please specify the requested valve in the following sequence:

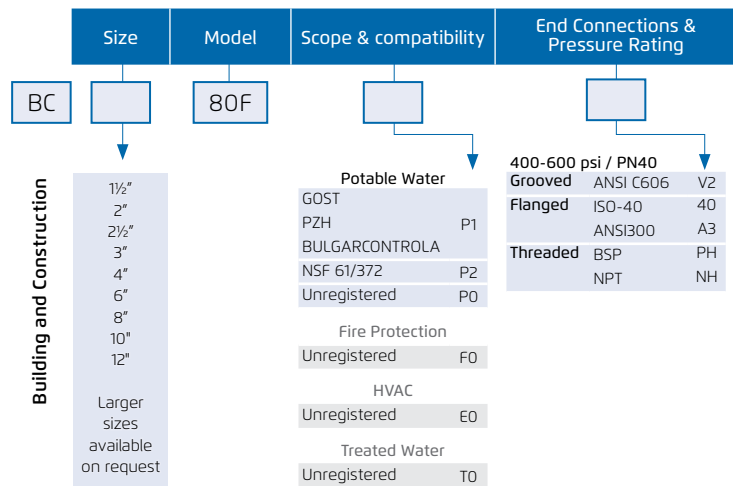

Dimensions and Weights

	DN Inch	Flanged (PN40)						
		40 1½	50 2	65 2½	80 3	100 4	150 6	200 8
L	mm	205	210	222	264	335	433	524
	Inch	8.07	8.27	8.74	10.39	13.19	17.05	20.63
W	mm	156	166	190	210	254	318	382
	Inch	6.14	6.54	7.48	8.27	10.00	12.52	15.04
h	mm	78	83	95	100	115	143	172
	Inch	3.07	3.27	3.74	3.94	4.53	5.63	6.78
H	mm	203	208	220	275	337	429	521
	Inch	7.99	8.19	8.66	10.83	13.27	16.89	20.51
D	mm	20	20	20	40	40	50	50
	Inch	¾	¾	¾	1½	1½	2	2
Weight	Kg	7	9	12	18	31	52	85
	lb	15.8	20.3	26.1	40.4	68.6	115.4	188.0

C = Half of H



For other optional materials consult BERMAD

For Dimensions & Weights, IOM and more other detailed engineering data, visit the Series Engineering Documentation or the Downloads Center on the [BERMAD website](#)

Drinking Water Standards, Approvals & Certification:





Trädgårdsteknik AB
Helsingborgsvägen 578
262 96 ÄNGELHOLM
Telefon: 0431-222 90
Telefax: 0431-222 70
info@tradgardsteknik.se
www.tradgardsteknik.se
