

AD6-160L



8,5mt
HYDRAULIC

359°



1500-1800



61 dB(A) @ 7mt

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
6	150W LED	8,5




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
850	2330	1470	2450 / 8500

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60,00%

LIGHTING DETAILS

AD6-160L

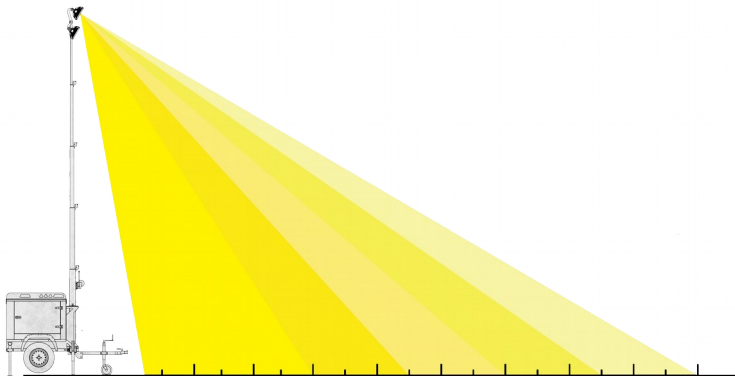

Light	Headlights		6 x 160W
	Headlights type		LED
	Lumen each	lm	20350
	Lightable area	m ²	4200 @ 5 lux

TECHNICAL DETAILS

General	Max height	mt	8,5
	Lifting system type		Hydraulic
	Rotation		359°
	Maximum wind resistance	km/h	110
	Prime power	kVA (kW)	3,5 (3,5)
	Voltage and frequency	V – Hz	230V – 50Hz
	Tank capacity	Lt	120
	Autonomy with working headlights	hr	250
Engine	Engine		KOHLER KDW702
	Engine power	Hp (kW)	6,6 (4,9)
	Nr. of cylinders		in line
	Displacement	cc	686
	Aspiration		Nat. Aspirated
	Cooling system		Water
Rpm		1500	
Alternator	Alternator		LINZ ELECTRIC
	Number of poles		4
	Type		Brushless
	Voltage regulation		Capacitor

STANDARD EQUIPMENT

LIGHTING TOWER

8,5mt height telescopic rod
Telescopic motorized hydraulic rod
n.6 160W LED lights
Manual headlights positioning
Standard twilight sensor
Electric control panel

GENERAL

Diesel engine
Single-phase alternator
12V battery
First oil filling
61dB(A) at 7mt soundproofed canopy
Slow towing trailer
Service power socket 230V (max 1,8kVA)
n.4 guides for forklift forks
n.4 stabilizers

OPTIONALS

Fast, road-type towing trailer homologated 950kg



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se