

ADB4-160L



HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	160W LED	8,5




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
950	2330	1470	2450 / 8500

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60,00%

LIGHTING DETAILS

ADB4-160L

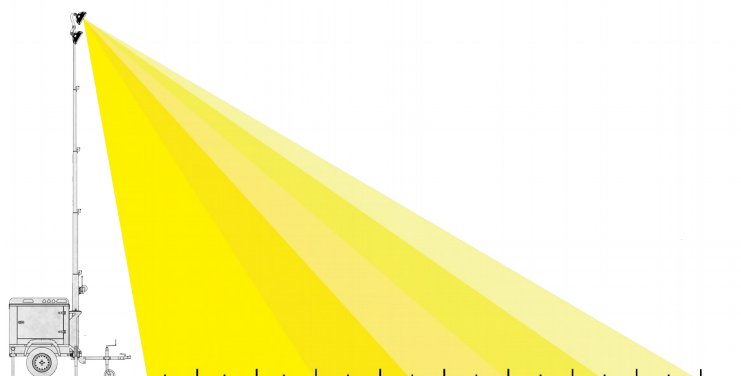

Light

<i>Headlights</i>		4 x 160W
<i>Headlights type</i>		LED
<i>Lumen each</i>	lm	20350
<i>Lightable area</i>	m ²	3000 @ 5 lux

TECHNICAL DETAILS

General

<i>Max height</i>	mt	8,5
<i>Lifting system type</i>		Hydraulic
<i>Rotation</i>		359°
<i>Maximum wind resistance</i>	km/h	110
<i>Voltage and frequency</i>	V – Hz	230V – 50Hz
<i>Autonomy with 30% working headlights</i>	hr	60

Battery

<i>Battery technology</i>		AGM 2V
<i>Energy management technology</i>		Inverter
<i>Battery pack capacity</i>	Ah	400
<i>Battery quantity</i>		12
<i>Battery recharge time</i>	hr	12
<i>Expected battery lifetime</i>		cycles

Advantages

<i>Maintenances costs</i>		
<i>Fuel costs</i>		
<i>Noise level</i>		
<i>Polluting emissions</i>		



STANDARD EQUIPMENT

LIGHTING TOWER

8,5mt height telescopic rod
Telescopic motorized hydraulic rod
n.4 160W LED lights
Manual headlights positioning
Dimmable lights (100-60-50-30%)
Standard twilight sensor
Electric control panel with inverter

GENERAL

12x2V AGM battery pack
Slow towing trailer
Service power socket 230V (max 1,8kVA)
n.4 guides for forklift forks
n.4 stabilizers

OPTIONALS

Fast, road-type towing trailer homologated 950kg



Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se